


THREE PHASE CENTRAL LIGHTING INVERTER PULSE WIDTH MODULATED, HIGH FREQUENCY UPS...

Incandescent, Fluorescent, HID, HPS, Power factor and energy efficient Ballast Compatible

COMPUTER ROOM • PRODUCTION FACILITY • TESTING LAB • TELECOMMUNICATIONS
RETAIL SALES / POS • INDUSTRIAL • GOVERNMENT • PUBLIC BUILDING • SCHOOLS
LIBRARY • HEALTHCARE • CRUISE LINE • BANKING / CREDIT • PRINTING FACILITY

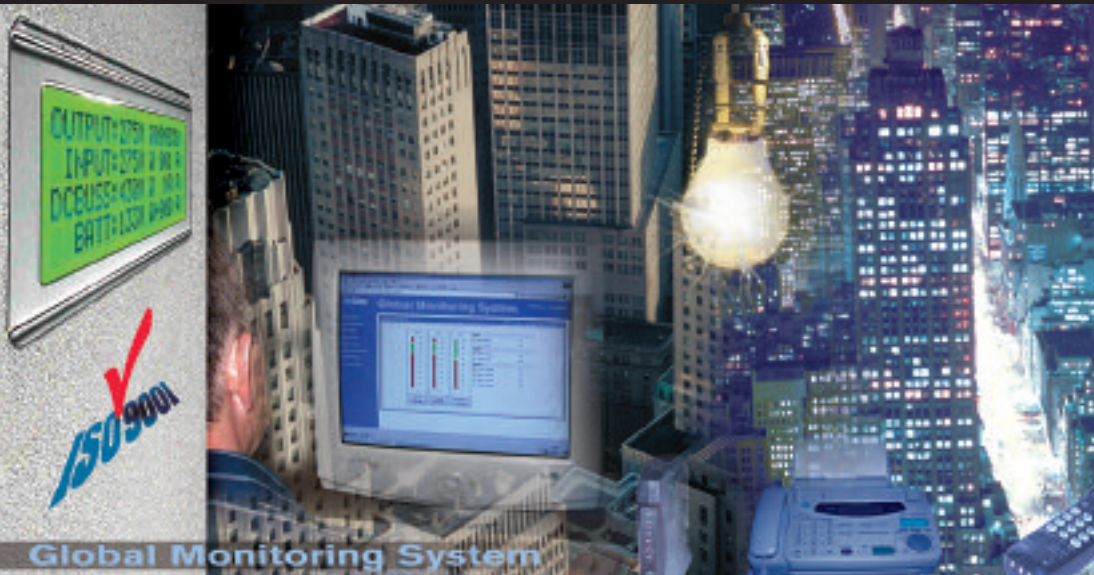

Global Monitoring System

POWER WAVE 3

10 TO 62.5 KVA



Emergency Lighting Approved

UL 924 with 90 minutes of sealed lead calcium batteries to power emergency lighting circuits, the Power Wave will keep egress path illuminated.

State of Art Technology

High Frequency PWM double conversion use Digital Signal Processing for control, measurement to protect the load. The Power Wave is always on-line, eliminating noise, spikes, sags, and brownouts. Should utility power fail, the inverter provides uninterrupted output power to the critical load. This high frequency unit is listed to UL1778, 924, and 924A by CSA.

Display (local and remote)

The Power Wave provides one of the most comprehensive monitoring packages. Its 4 line X 20 character backlit LCD panel continuously display and monitor vital power line conditions and status of the unit.

Global Monitoring System (GMS)

The Power Wave can communicate with computers, and serial devices via its local RS232/RS485 ports standard on every model making Power Wave compatible with today's most popular devices. Optional dry contacts are also available for remote monitoring and annunciation. GMS options includes dial-up modem, fax, alpha pager, beeper, email, and internet web page for monitoring or retrieving event logs and system status information.

Alarms

The Power Wave offers local alarm and optional remote display with sound alert (including unit status). It also offers most extensive method of remote alarm notification via pager, email, fax, voice annunciation and website. The system can advise multiple recipients.

Small Footprint Cabinet

The Power Wave requires less floorspace than most other UPS systems and Stackable Cabinet Rack are available as an option for more space savings. Its compact, lightweight design saves overall space, facilitates handling, and keeps shipping costs to a minimum.

Sine-Wave Power 21st Century

The Power Wave delivers computer-grade, sine-wave power; the preferred power source for all electronic equipment.

Isolation, Including Output Neutral To Ground Bonding

The Power Wave provides the galvanic electrical isolation required by FIPS PUB 94 (Federal Information Processing Standard) and it qualifies as a true, separately derived power source as defined by the National Electrical Code, Article 250-5d. This isolation allows the Power Wave to offer excellent RF noise filtering and single point grounding for sensitive electronic equipment (standard on all models with different input/output voltages). Optional harmonic tolerant transformer (up to K-50) for today's switching equipment is available.

Distribution (optional)

Normally On and OFF Output breakers are available with optional trip alarm as well as customer selectable time delay.

Safeguard™ Battery Management System

OnLine Power has designed (patent pending) a process for the real time ability to charge and monitor the battery system. This system utilizes a microprocessor technology to monitor the batteries critical levels and apply charging cycles in a method substantially increasing battery life.

Listed to
UL1778, UL924, UL924A by CSA

Power Factor and Energy
Efficient Ballast

LCD Panel for Monitoring

Global Monitoring System (GMS)

90% Efficiency (typ.)

Battery Exerciser

Inverter Test Switch

Pulse Width Modulated (PWM)
Double Conversion Technology

Sinusoidal Waveform

Modular Assembly for Ease of
Installation

Generator Compatible with
Automatic Governor
max 2Hz per second

Battery Exerciser

Small Foot Print Cabinet and
Certified Zone 4 Seismic Bracket

1 Year Warranty

POWER WAVE 3 SPECIFICATIONS

Power Rating:

10, 15, 20, 25, 30, 40, 50, 62.5 KVA

Input Voltage:

208Y/120 or 480Y/277

VAC (-20% to +15%)

Output Voltages:

208Y/120 or

480Y/277 VAC

Output Frequency (Inverter

Operation): 60 Hz ± 0.5 Hz

Voltage Regulation:

$\pm 3\%$, Regulated within CBEMA curve

Output Wave Form:

Sine-Wave < 5% THD.

Efficiency:

90% typical

Crest Factor:

3:1 Typical

Surge Protection (optional):

The UPS will protect itself and the load against surges as defined in ANSI/IEEE C62.41 Categories A and B.

Isolation:

Complete from line. Output neutral bonded to ground

Noise Isolation:

-120 dB Common-Mode;

-60 dB Transverse-Mode

Battery: Sealed, maintenance-free (AGM) battery

Recharge Current:

Conforms to UL Standards

External Battery:

Provisions for hardwire connection of optional external battery cabinets or DC source.

Environmental:

Humidity:

0 - 95% RH w/ no condensation

Operating Temperature:

UPS: 0° to 40°C. (32 -104°F)

Battery: 20° to 30°C. (68°-86°F)

Storage Temperature:

-20° to 60°C. (-4°-140°F)

Altitude:

Up to 10,000 ft

Safety Agencies:

Listed to UL1778 UPS, UL924, UL924A Lighting Standard, by CSA

Inverter Cabinet Sizes:

39" Wide x 18" Deep x 68" High

Battery Cabinet Sizes:

39" Wide x 18" Deep x 68" High

STANDARD FEATURES

- On-Line Central Lighting Inverter
- Back-lit LCD Display for monitoring
- RS 232 & RS 485 ports for metering, measuring and diagnostic.
- System pre-wired for optional Global Monitoring System (GMS)
- High Frequency PWM with Digital Signal Processing Technology
- Input and Output Circuit Breaker
- Generator Compatible with Automatic Governor (Slew Rate 2Hz/sec.)
- Inverter Test Switch
- Battery Breaker
- Stackable Cabinets
- Battery Management Software

OPTIONS

- Secondary Auxiliary Circuit Breakers: Normally On, Normally Off, Normally Off w/ Delay, Trip Alarm
- Form 'C' Contacts (5), (N.o.)
- Secondary Normally On/Off Terminal Block selection
- Remote Status Panel Unit with Audio Alarm and Silence Switch
- Local Audio Alarm with Silence Switch
- Input Current Harmonic Filter, 10% & 5% (This option will not be offer with Secondary Auxiliary Circuit Breakers)
- Make Before Break External Maintenance Bypass Switch
- Main Input and/or Output Circuit Breaker (with custom KAIC)
- Built-in Secondary Distribution
- External Attachable Panelboard (30-42 poles)
- EMI Filter
- Input Transient Voltage Surge Suppressor (TVSS)
- Harmonic Tolerance (up to K-50)
- Stackable Cabinet Rack to save floor space
- Certified Zone 4 Seismic Bracket
- Extended Warranty and Service Plans
- Spare Part Kits Available
- **Global Monitoring System (GMS)**

LOCAL

- Local PC via RS232 and RS485
- Event logging up to 500

REMOTE

● Dial-up

- Voice (10 event logging), numeric pager
- Voice, data, fax, pager, PC, e-mail, event logging up to 500
- Voice, data, fax, pager, PC, e-mail, and measurement (500 event logging plus graphic)

● Web/SNMP:

System status, measurement, alarm notification, event logging and password protected configuration.

Consult Factory for more features and choices of remote communication.remote communication.

*KVA/ KW	INPUT - OUTPUT	KVA Model Number	DC Volts	BTU/ Hr	Total Weights (lbs)	
					Inverter Cab.	(Qty) Battery Cab.
10/8	208Y/120 - 208Y/120 480Y/277 - 480Y/277 480Y/277 - 208Y/120	PW010B0500T3-VA PW010H0900T3-VA PW010H0500T3-VA	192	3032	(1 Cabinet) 1083 lbs	(1 Cabinets) 1612 lbs
15/12	208Y/120 - 208Y/120 480Y/277 - 480Y/277 480Y/277 - 208Y/120	PW015B0500T3-VA PW015H0900T3-VA PW015H0500T3-VA	192	4549	(1 Cabinet) 1446 lbs	(2 Cabinets) 2 x 1612 lbs
20/16	208Y/120 - 208Y/120 480Y/277 - 480Y/277 480Y/277 - 208Y/120	PW020B0500T3-VA PW020H0900T3-VA PW020H0500T3-VA	192	6066	(1 Cabinet) 1679 lbs	(2 Cabinets) 2 x 1780 lbs
25/20	208Y/120 - 208Y/120 480Y/277 - 480Y/277 480Y/277 - 208Y/120	PW025B0500T3-VA PW025H0900T3-VA PW025H0500T3-VA	192	7582	(1 Cabinet) 1679 lbs	(2 Cabinets) 2 x 2284 lbs
30/24	208Y/120 - 208Y/120 480Y/277 - 480Y/277 480Y/277 - 208Y/120	PW030B0500T3-VA PW030H0900T3-VA PW030H0500T3-VA	288	9098	(1 Cabinet) 1719 lbs	(3 Cabinets) 3 x 2284 lbs
40/32	208Y/120 - 208Y/120 480Y/277 - 480Y/277 480Y/277 - 208Y/120	PW040B0500T3-VA PW040H0900T3-VA PW040H0500T3-VA	312	12131	(1 Cabinet) 2066 lbs	** (3 Cabinets) 3 x 2888 lbs ** (4 Cabinets) 3 x 2284 lbs 1 x 748 lbs
50/40	208Y/120 - 208Y/120 480Y/277 - 480Y/277 480Y/277 - 208Y/120	PW050B0500T3-VA PW050H0900T3-VA PW050H0500T3-VA	552	15164	(1 Cabinet) 2463 lbs	(4 Cabinets) 4 x 2284 lbs 1 x 1948 lbs
62.5/ 50	208Y/120 - 208Y/120 480Y/277 - 480Y/277 480Y/277 - 208Y/120	PW062B0500T3-VA PW062H0900T3-VA PW062H0500T3-VA	552	18000	(1 Cabinet) 2565 lbs	(4 Cabinets) 4 x 2284 lbs 1 x 2270 lbs

* 75 KVA (60 KW) is available - contact factory

** 3 Cabinets with 10" Hutch OR 3 Cabinets plus One 48" Cabinet.

Standard Battery Back-up time is 90 minutes @ full load.

Longer Battery Back-up times available, consult factory.

Specifications are subject to change without prior notification.

UPW-6124A-20106

© Copyright OnLine Power, Inc. All rights reserved.



5701 Smithway Street
Commerce, CA 90040

Phone: (800) 227-8899

Fax: (323) 721-3929

www.onlinepower.com